

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
19 May 2005 (19.05.2005)

PCT

(10) International Publication Number
WO 2005/045248 A1

- (51) International Patent Classification⁷: **F04B 35/04**, 49/06, F25B 1/02
- (21) International Application Number:
PCT/KR2003/002419
- (22) International Filing Date:
11 November 2003 (11.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-Dong, Youngdungpo-Gu, 150-010 Seoul (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BAE, Gyoo-Jong** [KR/KR]; 175-7, Bonggok-Dong, 641-823 Changwon, Gyeongsangnam-Do (KR). **SHIN, Dong-Hee** [KR/KR]; Jugong 2-danji Apt. 201-1401, Danggam 4-Dong, Busan-jin-Gu, 614-766 Busan (KR).
- (74) Agent: **PARK, Jang-Won**; Jewoo Bldg. 5th Floor, 200, Nonhyun-Dong, Gangnam-Gu, 135-010 Seoul (KR).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DRIVING CONTROLLING APPRATUS OF LINEAR COMPRESSOR AND METHOD THEREOF

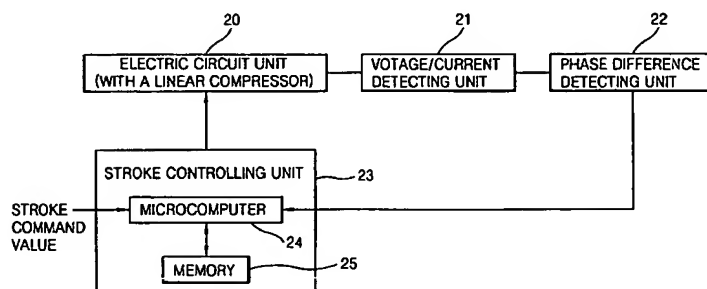

(57) Abstract: A driving controlling apparatus of a linear compressor and a method thereof are disclosed, in which a stroke is variably controlled at the time of a compression processing and a suction processing thus to prevent a consumption power decrease and a refrigerating capacity deficiency phenomenon and to enhance a reliability (v.u). A driving controlling method of a linear compressor, wherein a firing angle is respectively applied at the time of a compression processing and a suction processing according to a load state. The driving controlling apparatus comprises an electric circuit (20) for driving a linear compressor by varying a stroke by a piston movement; a voltage/current detecting unit (21) for detecting a voltage and a current generated at the electric circuit unit (20), a phase difference detecting unit (22) for receiving a voltage and a current from the voltage/current detecting unit (21) and thus detecting a voltage/current phase difference of a corresponding time point; and a stroke controlling unit (23) for receiving a phase difference from the phase difference detecting unit (22) and applying a stroke voltage to the electric circuit unit by diffrently applying a firing angle at the time of a compression processing and a suction processing, respectively on the basis of the input phase difference.

WO 2005/045248 A1